

---

# **data-pipelines-cli**

**GetInData**

**Oct 06, 2022**



**CONTENTS:**

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Community</b>	<b>5</b>
	<b>Python Module Index</b>	<b>47</b>
	<b>Index</b>	<b>49</b>







## **INTRODUCTION**

**Data Pipelines CLI**, also called **DP tool**, is a command-line tool providing an easy way to build and manage data pipelines based on **dbt** in an environment with **GIT**, **Airflow**, **DataHub**, **VSCoDe**, etc.

The tool can be used in any environment with access to shell and **Python** installed.

**data-pipelines-cli**'s main task is to cover technical complexities and provides an abstraction over all components that take part in Data Pipelines creation and execution. Thanks to the integration with templating engine it allows Analytics Engineers to create and configure new projects. The tool also simplifies automation as it handles deployments and publications of created transformations.





## COMMUNITY

Although the tools were created by [GetInData](#) and used in their project it is open-sourced and everyone is welcome to use and contribute to making it better and more powerful.

### 2.1 Installation

Use the package manager [pip](#) to install `data-pipelines-cli`:

```
pip install data-pipelines-cli [<flags>]
```

Depending on the systems that you want to integrate with you need to provide different flags in square brackets. You can provide comma separate list of flags, for example:

```
pip install data-pipelines-cli [gcs,git,bigquery]
```

Depending on the data storage you have you can use:

- bigquery
- snowflake
- redshift
- postgres

If you need git integration for loading packages published by other projects or publish them by yourself you will need:

- git

If you want to deploy created artifacts (docker images and DataHub metadata) add the following flags:

- docker
- datahub

These are not usually used by a person user.

If you need Business Intelligence integration you can use following options:

- looker

## 2.2 Setup an environment

This section is for Data Engineers who will be preparing and administrating the whole environment. It describes steps that should be done to prepare the DP tool to be used in an organization with full potential.

### 2.2.1 Create Data Pipeline project template

The first thing that you need to do is to create a git repository with a project template used later to create multiple projects. The template should contain the whole directory structure and files used in your projects. Additionally, it should have a connection configuration to all components in your environment, CICD, and all other aspects specific to your company. Here you can find templates examples that you can adjust to your need: <https://github.com/getindata/data-pipelines-template-example> . Based on the template The Data Pipelines CLI will ask a user a series of questions to build the final project.

Thanks to the copier you can leverage Jinja template syntax to create easily modifiable configuration templates. Just create a `copier.yml` and configure the template questions (read more at [copier documentation](#)).

### 2.2.2 Create a template to setup a local environment

Working with Data Pipelines usually requires local variables to be set to run and test avoiding messing in shared environments (DEV, STAGE, PROD). To simplify working environment preparation we also decided to use templates that will ask a series of questions and generate local configuration in a home directory.


It requires a repository with a global configuration template file that you or your organization will be using. The repository should contain `dp.yml.tpl` file looking similar to this:

```
templates:
  my-first-template:
    template_name: my-first-template
    template_path: https://github.com/<YOUR_USERNAME>/<YOUR_TEMPLATE>.git
vars:
  username: YOUR_USERNAME
```

The file must contain a list of available templates. The templates will be displayed and available for selection in Data Pipelines CLI. The next section contains variables that will be passed to the project whenever running in the configured environment. The same rules apply in template creation as for project templates.

## 2.3 Usage

This section is for Data Pipelines CLI's users. It will present how to use the tool and how it handles interaction with the whole Data environment. Below diagram presents the sequence process how usually the tool is used and order in which different commands are executed:

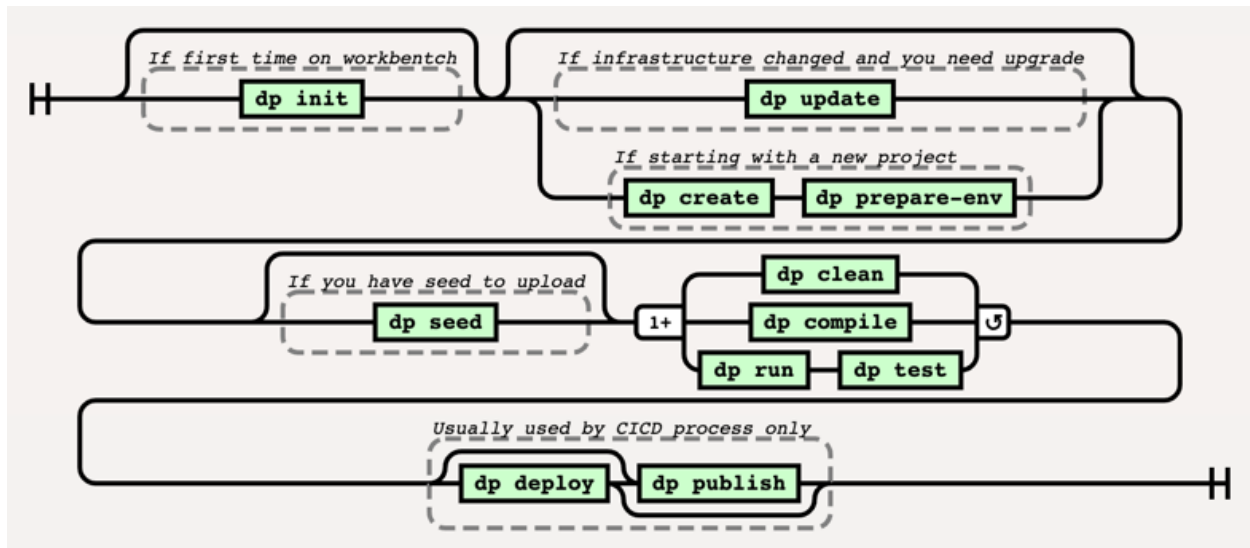

### 2.3.1 Preparing working environment


The first thing that needs to be done when starting Building Data Pipelines is to prepare the working environment. This step can be done either on a local machine on any kind of Workbench (eg. JupyterLab). You will need a link from your Data Engineer or Administrator to the template with initial configuration then, run `dp init <CONFIG_REPOSITORY_URL>` to initialize **dp**. You can also drop `<CONFIG_REPOSITORY_URL>` argument, **dp** will get initialized with an empty config.

This step is done only the first time for each working environment you want to use.

Example:

In this example only one variable you will be asked for and it is going to be *username* which is used in many **dp** commands.

```
dp init https://github.com/getindata/data-pipelines-cli-init-example
```

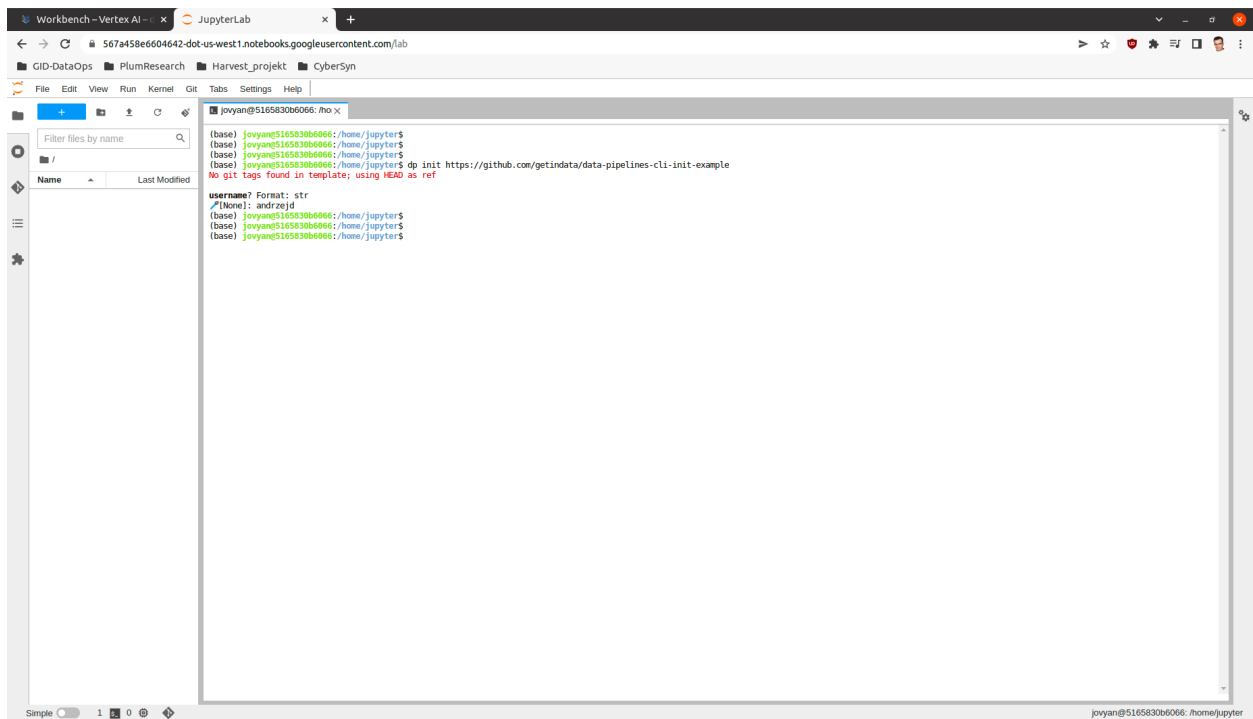

### 2.3.2 Project creation

You can use `dp create <NEW_PROJECT_PATH>` to choose one of the templates to create the project in the `<NEW_PROJECT_PATH>` directory.

You can also use `dp create <NEW_PROJECT_PATH> <LINK_TO_TEMPLATE_REPOSITORY>` to point directly to a template repository. If `<LINK_TO_TEMPLATE_REPOSITORY>` proves to be the name of the template defined in `dp`'s config file, `dp create` will choose the template by the name instead of trying to download the repository.


After the template selection, you will be asked a series of predefined questions in the template. Answering them all will cause a new empty project to be generated. The project will be adjusted and personalized based on answers to the questions.

Example:


Following command starts project creation process.

```
dp create our-simple-project
```

Fist step after this command is template selection:

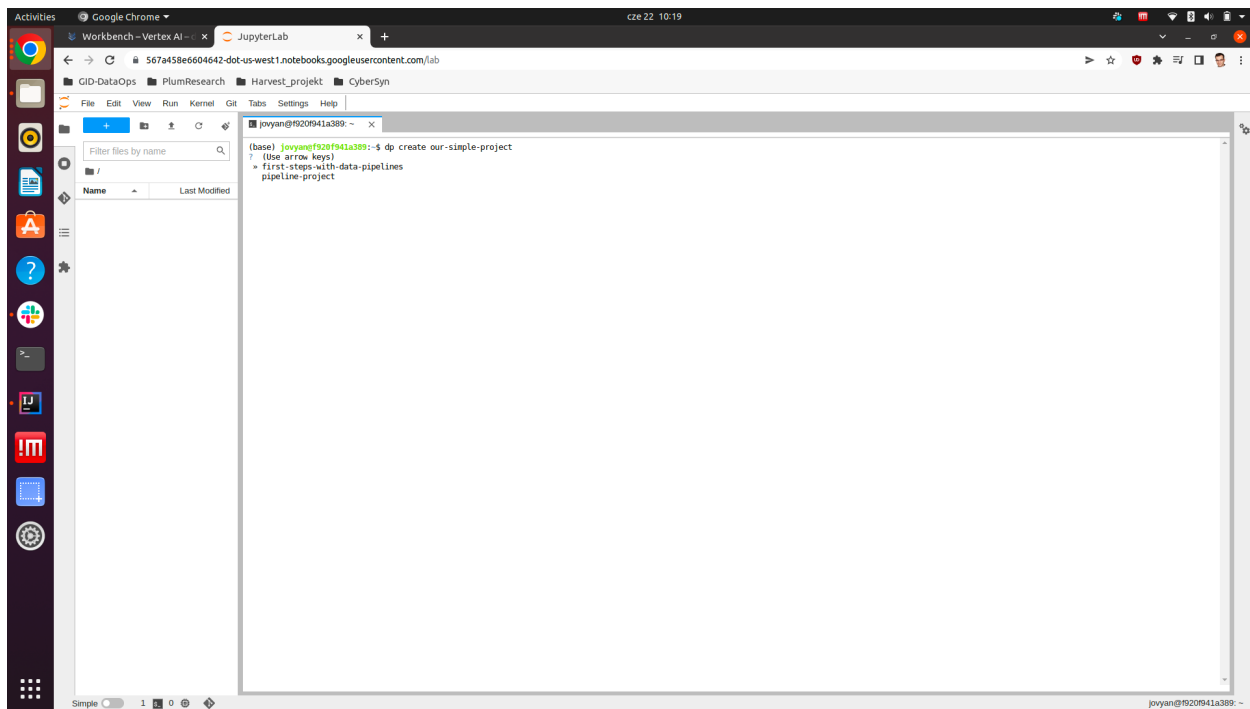

We can switch options by pressing up and down buttons and we can make a decision by pressing enter. After that, series of questions will be asked. Be aware that the name of the DP project should be composed of alpha-numeric signs and the \_ sign. After answering these questions the tool will generate complete project.

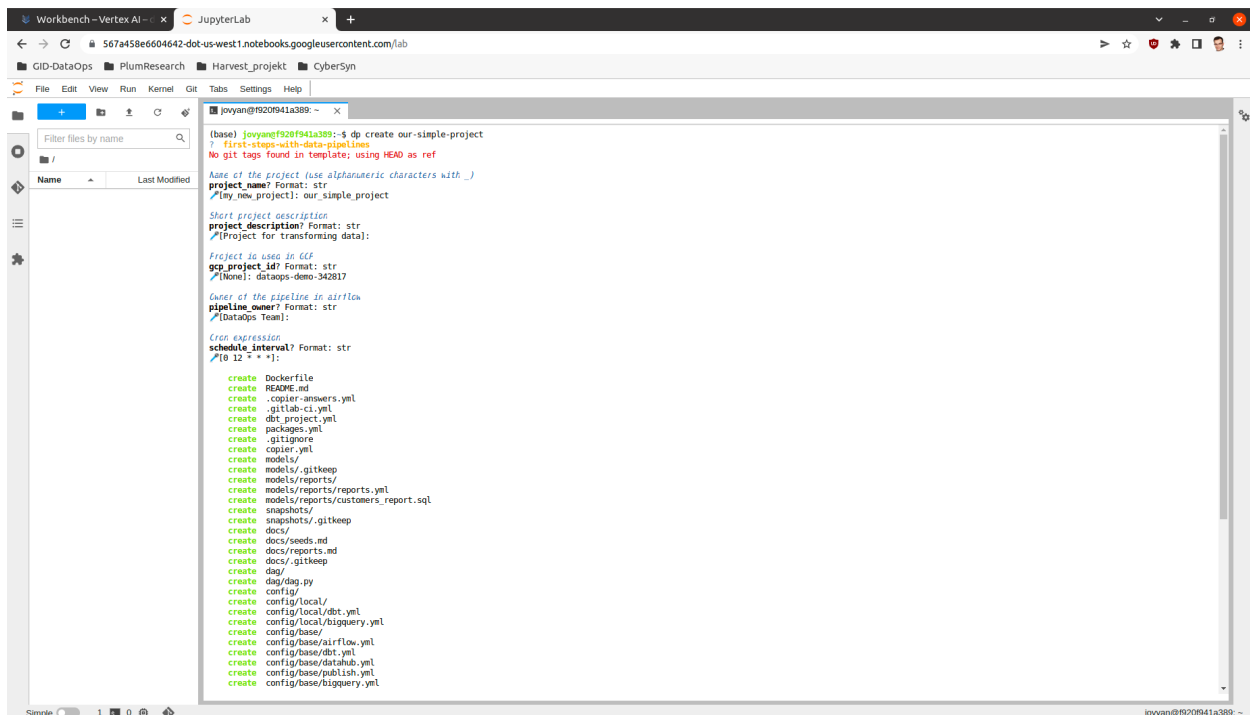

### 2.3.3 Adapting working environment to VSCode

VSCode is recommended tool to work with **dbt** as you can add a plugin that makes the work more efficient. To configure the plugin or integrate it with some other standalone application you will need to generate `profiles.yml` file from the project. `dp prepare-env` prepares your local environment to be more conformant with standalone **dbt** requirements by saving `profiles.yml` in the home directory.

However, be aware that IDE usage is optional, and you can comfortably use `dp run` and `dp test` commands to interface with the **dbt** instead.

### 2.3.4 List all available templates

Execute `dp template-list` to list all added templates.

### 2.3.5 Project update

Whenever the template change you can update your project using `dp update <PIPELINE_PROJECT-PATH>` command. It will sync your existing project with the updated template version selected by `--vcs-ref` option (default HEAD).

It may be very useful when there are some infrastructure changes in your organization and you need to upgrade all created projects (there can be hundreds of them).

### 2.3.6 Project compilation

`dp compile` prepares your project to be run on your local machine and/or deployed on a remote one.

### 2.3.7 Local run

When you get your project created, you can run `dp run` and `dp test` commands.

- `dp run` runs the project on your local machine,
- `dp test` runs tests for your project on your local machine.

Both commands accept `--env` parameter to select the execution environment. The default value is `local`.

Example:

```
dp run
```

This process will look at the contents of the `models` directory and create corresponding tables or views in data storage.

```

08:40:02 Completed successfully
08:40:02 Done. PASS=2 WARN=0 ERROR=0 SKIP=0 TOTAL=2
(base) joyan@f920f941a389:~/our-simple-projects
(base) joyan@f920f941a389:~/our-simple-projects
(base) joyan@f920f941a389:~/our-simple-projects dp run
Copying 'config' directory to /home/joyan/our-simple-project/build/dag/config
Missing config file: /home/joyan/our-simple-project/build/dag/config/local/execution.env.yml
Missing config file: /home/joyan/our-simple-project/build/dag/config/local/execution.env.yml
The tool has run across a following error when trying to get git revision hash. Ensure your project is a Git repository (run 'git init', if not).
fatal: not a git repository (or any of the parent directories): .git

Could not get git revision hash.
Replacing <PAGE_TAG> with image tag = None
Replacing Jinja variables in /home/joyan/our-simple-project/build/dag/config/base/databus.yml.
Generating profiles.yml in /home/joyan/our-simple-project/build/profiles/local
Running dbt commands:
dbt deps
08:40:12 Running with dbt=1.0.4
08:40:13 Installing dbt-labs/dbt_utils
08:40:14 Installed from version 0.8.0
08:40:14 Updated version available: 0.8.6
08:40:14 Installing calogica/dbt_expectations
08:40:14 Installed from version 0.5.8
08:40:14 Up to date!
08:40:14 Installing dbt-labs/codegen
08:40:14 Installed from version 0.6.0
08:40:14 Up to date!
08:40:14 Installing calogica/dbt_date
08:40:14 Installed from version 0.5.7
08:40:14 Up to date!
08:40:14 Updates available for packages: ['dbt-labs/dbt_utils']
Update your versions in packages.yml, then run dbt deps
dbt compile
08:40:18 Running with dbt=1.0.4
08:40:18 Found 1 model, 1 test, 0 snapshots, 0 analyses, 583 macros, 0 operations, 2 seed files, 0 sources, 0 exposures, 0 metrics
08:40:18 Concurrency: 1 threads (target='local')
08:40:18 Done.
dbt docs generate
08:40:22 Running with dbt=1.0.4
08:40:22 Found 1 model, 1 test, 0 snapshots, 0 analyses, 583 macros, 0 operations, 2 seed files, 0 sources, 0 exposures, 0 metrics
08:40:22 Concurrency: 1 threads (target='local')
08:40:22 Done.
08:40:22 Building catalog
08:40:25 Catalog written to /home/joyan/our-simple-project/target/catalog.json
dbt source freshness
08:40:29 Running with dbt=1.0.4
08:40:29 Found 1 model, 1 test, 0 snapshots, 0 analyses, 583 macros, 0 operations, 2 seed files, 0 sources, 0 exposures, 0 metrics

```

Now after all the tables and views are created we can also check, if the models work as intended by running the tests.

**dp test**

```

08:41:40 Running with dbt=1.0.4
08:41:41 Installing dbt-labs/dbt_utils
08:41:42 Installed from version 0.8.0
08:41:42 Updated version available: 0.8.6
08:41:42 Installing calogica/dbt_expectations
08:41:42 Installed from version 0.5.8
08:41:42 Up to date!
08:41:42 Installing dbt-labs/codegen
08:41:42 Installed from version 0.6.0
08:41:42 Up to date!
08:41:42 Installing calogica/dbt_date
08:41:42 Installed from version 0.5.7
08:41:42 Up to date!
08:41:42 Updates available for packages: ['dbt-labs/dbt_utils']
Update your versions in packages.yml, then run dbt deps
dbt compile
08:41:45 Running with dbt=1.0.4
08:41:46 Found 1 model, 1 test, 0 snapshots, 0 analyses, 583 macros, 0 operations, 2 seed files, 0 sources, 0 exposures, 0 metrics
08:41:46 Concurrency: 1 threads (target='local')
08:41:46 Done.
dbt docs generate
08:41:50 Running with dbt=1.0.4
08:41:50 Found 1 model, 1 test, 0 snapshots, 0 analyses, 583 macros, 0 operations, 2 seed files, 0 sources, 0 exposures, 0 metrics
08:41:50 Concurrency: 1 threads (target='local')
08:41:50 Done.
08:41:50 Building catalog
08:41:53 Catalog written to /home/joyan/our-simple-project/target/catalog.json
dbt source freshness
08:41:56 Running with dbt=1.0.4
08:41:56 Found 1 model, 1 test, 0 snapshots, 0 analyses, 583 macros, 0 operations, 2 seed files, 0 sources, 0 exposures, 0 metrics
08:41:56 [WARNING]: Nothing to do. Try checking your model configs and model specification args
08:41:56 Done.
Copying dbt manifest
dbt test
08:42:00 Running with dbt=1.0.4
08:42:00 Found 1 model, 1 test, 0 snapshots, 0 analyses, 583 macros, 0 operations, 2 seed files, 0 sources, 0 exposures, 0 metrics
08:42:00 Concurrency: 1 threads (target='local')
08:42:00
08:42:00 1 of 1 START test assert active customers in every country..... [RUN]
08:42:02 1 of 1 PASS assert_active_customers_in_every_country..... [PASS in 1.41s]
08:42:02 Finished running 1 test in 1.69s.
08:42:02 Completed successfully
08:42:02 Done. PASS=1 WARN=0 ERROR=0 SKIP=0 TOTAL=1
(base) joyan@f920f941a389:~/our-simple-projects

```

### 2.3.8 dbt sources and automatic models creation

With the help of `dbt-codegen` and `dbt-profiler`, one can easily generate `source.yml`, source's base model SQLs, and model-related YAMLs. `dp` offers a convenient CLI wrapper around those functionalities.

First, add the **dbt-codegen** package to your `packages.yml` file:

```
packages:
- package: dbt-codegen
  version: 0.5.0 # or newer
```

Then, run `dp generate source-yaml YOUR_DATASET_NAME` to generate `source.yml` file in `models/source` directory. You can list more than one dataset, divided by space. After that, you are free to modify this file.

When you want to generate SQLs for your sources, run `dp generate source-sql`. It will save those SQLs in the directory `models/staging/YOUR_DATASET_NAME`.

Finally, when you have all your models prepared (in the form of SQLs), run `dp generate model-yaml MODELS_DIR` to generate YAML files describing them (once again, you are not only free to modify them but also encouraged to do so!). E.g., given such a directory structure:

```
models
├── staging
│   ├── my_source
│   │   ├── stg_table1.sql
│   │   └── stg_table2.sql
│   └── intermediate
│       ├── intermediate1.sql
│       ├── intermediate2.sql
│       └── intermediate3.sql
└── presentation
    └── presentation1.sql
```

`dp generate model-yaml models/` will create `models/staging/my_source/my_source.yml`, `models/staging/intermediate/intermediate.yml`, and `models/presentation/presentation.yml`. Beware, however, this command WILL NOT WORK if you do not have those models created in your data warehouse already. So remember to run `dp run` (or a similar command) beforehand.

If you add the **dbt-profiler** package to your `packages.yml` file too, you can call `dp generate model-yaml --with-meta MODELS_DIR`. **dbt-profiler** will add a lot of profiling metadata to descriptions of your models.



### 2.3.9 Project deployment

`dp deploy` executes the deployment of a project. Depending on the configuration the command may execute different steps described in this section. Please be aware that this command is meant for the CI/CD process and usually should be avoided as manual activity.

#### Blob storage synchronization

The main action of the `dp deploy` command is synchronization with your bucket provider. The provider will be chosen automatically based on the remote URL. Usually, it is worth pointing `dp deploy` to a JSON or YAML file with provider-specific data like access tokens or project names. The *provider-specific data* should be interpreted as the `**kwargs` (keyword arguments) expected by a specific `fsspec`'s `FileSystem` implementation. One would most likely want to look at the `S3FileSystem` or `GCSFileSystem` documentation.

E.g., to connect with Google Cloud Storage, one should run:

```
echo '{"token": "<PATH_TO_YOUR_TOKEN>", "project_name": "<YOUR_PROJECT_NAME>"}' > gs_
↪args.json
dp deploy --dags-path "gs://<YOUR_GS_PATH>" --blob-args gs_args.json
```

However, in some cases, you do not need to do so, e.g. when using **gcloud** with properly set local credentials. In such a case, you can try to run just the `dp deploy --dags-path "gs://<YOUR_GS_PATH>"` command and let `gcsfs` search for the credentials. Please refer to the documentation of the specific `fsspec`'s implementation for more information about the required keyword arguments.

You can also provide your path in the `config/base/airflow.yml` file, as a `dags_path` argument:

```
dags_path: gs://<YOUR_GS_PATH>
# ... rest of the 'airflow.yml' file
```

In such a case, you do not have to provide a `--dags-path` flag, and you can just call `dp deploy` instead.

#### Docker image

`dp deploy` command builds Docker image with **dbt** and project and sends it to Docker Registry. Docker registry may be configured via Environment Variables (eg. `DOCKER_AUTH_CONFIG`) and the image repository can be configured in `execution_env.yml` file. Use `--docker-push` flag to enable docker pushing during deployment.

#### DataHub synchronization

The deployment also sends metadata to DataHub based on receipt created in `datahub.yml` file. Use `--datahub-ingest` flag to enable DataHub synchronization.

### 2.3.10 Packing and publishing

Sometimes there is a need to reuse data created in other projects and/or by a different team. The built project can be converted to a **dbt** package by calling `dp publish`. `dp publish` parses `manifest.json` and prepares a package from the presentation layer. It lists models created by transformations and they usually are a final product of a project. The models are prepared in form of **dbt** sources. Created metadata files are saved in the `build/package` directory and sent to a git repository configured in `publish.yml` file.

Publication repo usually is private for a company and appropriate permissions are required. We recommend key-based communication. You can use `--key-path` as a parameter to point to the key file with push permissions.

#### Using published sources

Published packages can be used as standard **dbt** packages by adding them in `packages.yml` in the following form:

```
packages:
- git: "https://{{env_var('DBT_GIT_USER_NAME', '')}}:{{env_var('DBT_GIT_SECRET_TOKEN', '
  ↳')}}@gitlab.com/<path to you repository>"
  subdirectory: "<upstream project name>"
```

#### Dependencies metadata

Created metadata files containing extra information about the project name (which can be also Airflow DAG name).

```
"source_meta": {
  "dag": "<project name>"
}
```

This way explicit dependencies can be created in the execution environment. For more information see the documentation of *dbt-airflow-factory* <<https://dbt-airflow-factory.readthedocs.io/en/latest/features.html#source-dependencies>>

### 2.3.11 Clean project

If needed call `dp clean` to remove compilation-related directories.

### 2.3.12 Load seed

One can use `dp seed` to load seeds from the project. Use `--env` to choose a different environment.

### 2.3.13 Serve documentation

dbt creates quite good documentation and sometimes it is useful to expose them to your coworkers on a custom port. To do that you can run `dbt docs --port <port>` command.

## 2.4 Project configuration

**dp** as a tool depends on a few files in your project directory. It must be able to find a `config` directory with a structure looking similar to this:

```
config
├── base
│   ├── dbt.yml
│   ├── bigquery.yml
│   └── ...
├── dev
│   └── bigquery.yml
├── local
│   ├── dbt.yml
│   └── bigquery.yml
└── prod
    └── bigquery.yml
```

Whenever you call **dp**'s command with the `--env <ENV>` flag, the tool will search for `dbt.yml` and `<TARGET_TYPE>.yml` files in `base` and `<ENV>` directory and parse important info out of them, with `<ENV>` settings taking precedence over those listed in `base`. So, for example, for the following files:

```
# config/base/dbt.yml
target: env_execution
target_type: bigquery

# config/base/bigquery.yml
method: oauth
project: my-gcp-project
dataset: my-dataset
threads: 1

# cat config/dev/bigquery.yml
dataset: dev-dataset
```

`dp test --env dev` will run `dp test` command using values from those files, most notably with `dataset: dev-dataset` overwriting `dataset: my-dataset` setting.

**dp** synthesizes `dbt's profiles.yml` out of those settings among other things. However, right now it only creates `local` or `env_execution` profile, so if you want to use different settings amongst different environments, you should rather use `{{ env_var('VARIABLE') }}` as a value and provide those settings as environment variables. E.g., by setting those in your `config/<ENV>/k8s.yml` file, in `envs` dictionary:

```
# config/base/bigquery.yml
method: oauth
dataset: "{{ env_var('GCP_DATASET') }}"
project: my-gcp-project
threads: 1
```

(continues on next page)

(continued from previous page)

```
# config/base/execution_env.yml
# ... General config for execution env ...

# config/base/k8s.yml
# ... Kubernetes settings ...

# config/dev/k8s.yml
envs:
  GCP_DATASET: dev-dataset

# config/prod/k8s.yml
envs:
  GCP_DATASET: prod-dataset
```

### 2.4.1 dbt configuration

The main configuration is in `config/<ENV>/dbt.yml` file. At the moment it allows setting two values: \* `target` - should be set either to `local` or `env_execution` depending on where the tool is used. Local means running locally while `env_execution` means executing by the scheduler on the dev or prod environment. \* `target_type` - defines which backend **dbt** will use and what file **dp** will search for additional configuration (example: `bigquery` or `snowflake`).

Additionally, the backend configuration file should be provided with a name depending on the selected `target_type` (`<target_type>.yml`). For example setting `target_type` to `bigquery` **dp** will look for `bigquery.yml` files. This file should consist of all configurations that will be used to build `profile.yml`. Example files for the production environment:

```
method: service-account
keyfile: "{{ env_var('GCP_KEY_PATH') }}"
project: gid-dataops-labs
dataset: presentation
threads: 1
timeout_seconds: 300
priority: interactive
location: europe-central2
retries: 1
```

### Variables

You can put a dictionary of variables to be passed to **dbt** in your `config/<ENV>/dbt.yml` file, following the convention presented in [the guide at the dbt site](#). E.g., if one of the fields of `config/<SNOWFLAKE_ENV>/snowflake.yml` looks like this:

```
schema: "{{ var('snowflake_schema') }}"
```

you should put the following in your `config/<SNOWFLAKE_ENV>/dbt.yml` file:

```
vars:
  snowflake_schema: EXAMPLE_SCHEMA
```

and then run your `dp run --env <SNOWFLAKE_ENV>` (or any similar command).

You can also add “global” variables to your **dp** config file `$HOME/.dp.yml`. Be aware, however, that those variables get erased on every `dp init` call. It is a great idea to put *commonly used* variables in your organization’s `dp.yml.tpl` template and make **copier** ask for those when initializing **dp**. By doing so, each member of your organization will end up with a list of user-specific variables reusable across different projects on its machine. Just remember, **global-scoped variables take precedence over project-scoped ones**.

## 2.4.2 Airflow configuration

Airflow-related configuration is stored in `config/<ENV>/airflow.yml` file and is strongly connected to the Airflow plugin: `dbt-airflow-factory`. More information about this configuration can be found [here](#)

One important config from **dp** tool in this file is `days_path`. It sets the URL to blob storage that is responsible for storing projects DAGs with other artifacts.

## 2.4.3 Execution environment configuration

All configuration about how **dbt** is executed on the Airflow side is kept in `execution_env.yml` and `<env type>.yml`. More information about these settings can be found [here](#)

## 2.4.4 Publication configuration

`config/<ENV>/publish.yml` file contains configuration about creating **dbt** packages for downstream projects and publishing it to a git repository as a package registry.

Parameter	Data type	Description
<code>repository</code>	string	HTTPS link to repo that works as packages repository.
<code>branch</code>	string	Branch of the selected repository where packages are published.
<code>username</code>	string	User name that will be presented as package publisher in GIT.
<code>email</code>	string	Email of the package publisher.

## 2.4.5 Data governance configuration

**dp** can send **dbt** metadata to DataHub. All related configuration is stored in `config/<ENV>/datahub.yml` file. More information about it can be found [here](#) and [here](#).

## 2.4.6 Business Intelligence configuration

BI configuration is divided into two levels:

- General: `config/<ENV>/bi.yml` file
- BI tool related: e.g. `config/<ENV>/looker.yml`

`config/<ENV>/bi.yml` contains basic configuration about BI integration:


Parameter	Data type	Description
is_bi_enabled	bool	Flag for enable/disable BI option in <b>dp</b> .
bi_target	string	BI tool you want to working with (currently only Looker is supported).
is_bi_compile	bool	Whether generate BI code in compile phase?
is_bi_deploy	bool	Whether deploy and push BI codes?

`config/<ENV>/looker.yml` contains more detailed configuration related to BI tool:

Parameter	Data type	Description
looker_repository	string	Git repository used by Looker project you want to integrate.
looker_repository_username	string	Git config - username for operating with repository
looker_repository_email	string	Git config - user email for operating with repository
looker_project_id	string	Looker's project ID
looker_webhook_secret	string	Looker's project webhook secret for deployment
looker_repository_branch	string	Looker's repository branch for deploy new codes
looker_instance_url	string	URL for you Looker instance

## 2.5 Integration with environment

**Data Pipelines CLI** provides some sort of abstraction over multiple other components that take part in Data Pipeline processes. The following picture presents the whole environment which is handled by our tool.

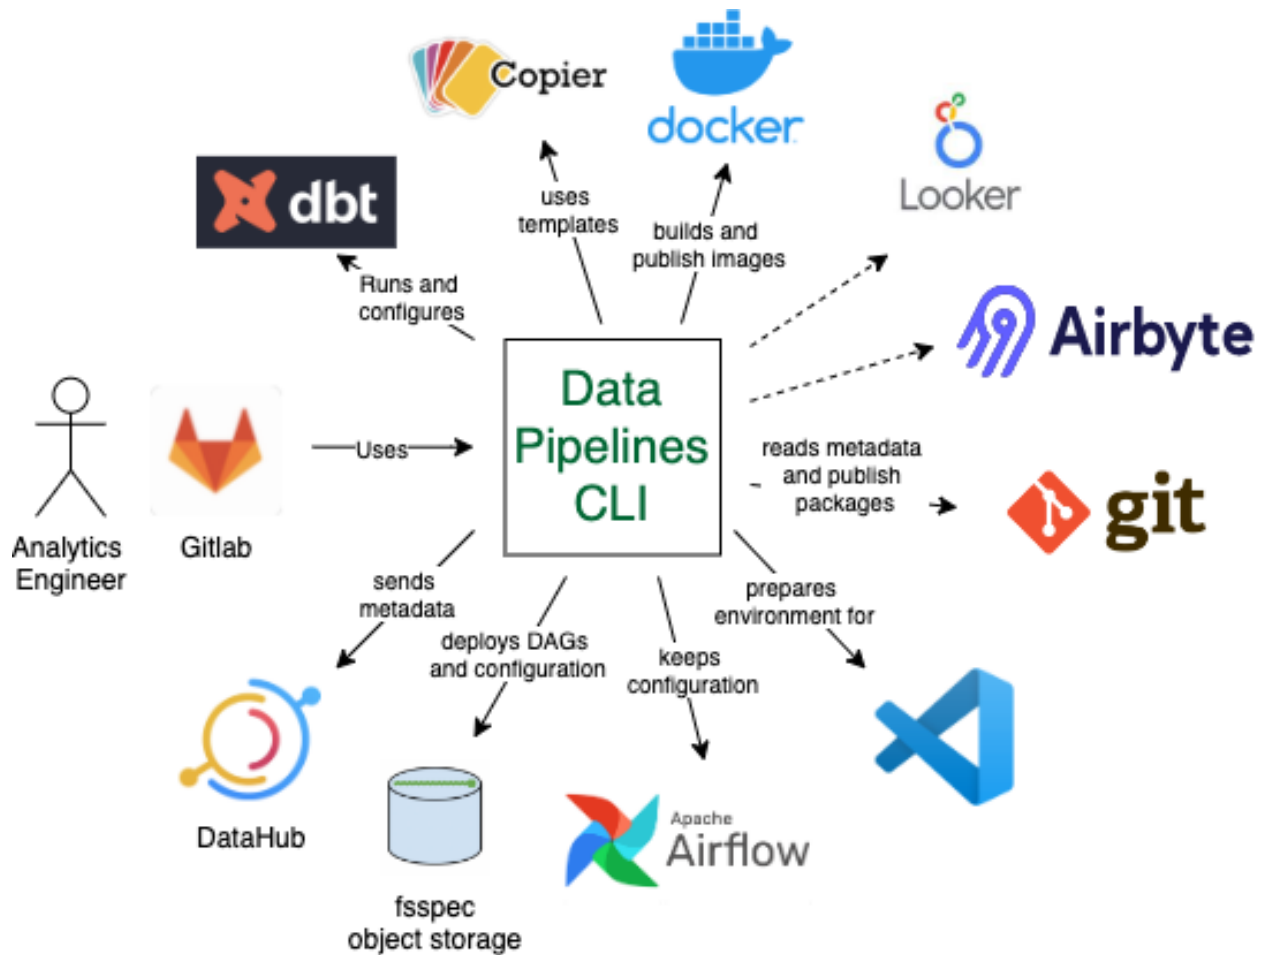

### 2.5.1 dbt

**dbt** is currently the main tool that **DP** integrates with. The purpose of the **DP** tool is to cover **dbt** technicalities including configuration and generates it on the fly whenever needed. At the same time, it gives more control over **dbt** process management by chaining commands, interpolating configuration, and providing easy environments portability.

### 2.5.2 Copier

**DP** is heavily using **Copier** as templating tool. It gives a possibility to easily create new projects that are configured automatically after a series of questions. It is also used to configure the working environment with required environment variables.

### 2.5.3 Docker

One of the artifacts during building and publishing Data Pipelines are [Docker's](#) images. Each created image contains **dbt** with its transformation and scripts to run. Created images are environment agnostic and can be deployed in any external configuration. Images are pushed to the selected Container Registry which configuration should be taken from the environment (there should be a docker client configured).

### 2.5.4 Git

The *Data Pipelines CLI* can also publish created **dbt** packages for downstream usage into configured [GIT](#) repository. It uses key-based authentication where the key is provided as parameter *-key-path*

### 2.5.5 Airflow

**DP** doesn't communicate directly with Airflow, it rather sends artifacts to Object storage managed by Airflow and [dbt-airflow-factory](#) library handles the rest. Created projects keep DAG and configuration required to execute on the Airflow side.

### 2.5.6 Object storage

Configuration, Airflow DAG, and **dbt** manifest.json file are stored in Object storage for Airflow to be picked up and executed. the **DP** uses [fsspec](#) which gives a good abstraction over different object storage providers. Currently, the tools were tested with GCS and S3.

### 2.5.7 DataHub

The *Data Pipelines CLI* is able to send data to [DataHub](#) based on a recipe in configuration. The tool uses DataHub CLI under the hood.

### 2.5.8 Visual Studio Code

[VS Code](#) is one of the recommended by us tools to work with **dbt**. **DP** tool simplify integration of the created project with the *VS Code* plugin for **dbt** management.

### 2.5.9 Airbyte

Under development

### 2.5.10 Looker

**dp** can generate lookML codes for your models and views, publish and deploy your [Looker](#) project



## 2.6 CLI Commands Reference

If you are looking for extensive information on a specific CLI command, this part of the documentation is for you.

### 2.6.1 dp

```
dp [OPTIONS] COMMAND [ARGS]...
```

#### Options

##### **--version**

Show the version and exit.

#### **clean**

Delete local working directories

```
dp clean [OPTIONS]
```

#### **compile**

Create local working directories and build artifacts

```
dp compile [OPTIONS]
```

#### Options

##### **--env** <env>

**Required** Name of the environment

**Default** local

##### **--docker-build**

Whether to build a Docker image

##### **--docker-tag** <docker\_tag>

Image tag of a Docker image to create

##### **--docker-args** <docker\_args>

Args required to build project in json format

### create

Create a new project using a template

```
dp create [OPTIONS] PROJECT_PATH [TEMPLATE_PATH]...
```

### Arguments

#### PROJECT\_PATH

Required argument

#### TEMPLATE\_PATH

Optional argument(s)

### deploy

Push and deploy the project to the remote machine

```
dp deploy [OPTIONS]
```

### Options

**--env** <env>

Name of the environment

**Default** base

**--dags-path** <dags\_path>

Remote storage URI

**--blob-args** <blob\_args>

Path to JSON or YAML file with arguments that should be passed to your Bucket/blob provider

**--docker-push**

Whether to push image to the Docker repository

**--datahub-ingest**

Whether to ingest DataHub metadata

**--bi-git-key-path** <bi\_git\_key\_path>

Path to the key with write access to repo

### docs-serve

Generate and serve dbt documentation.

```
dp docs-serve [OPTIONS]
```

## Options

**--env** <env>

Name of the environment

**Default** local

**--port** <port>

Port to be used by the 'dbt docs serve' command

**Default** 9328

## generate

Generate additional dbt files

```
dp generate [OPTIONS] COMMAND [ARGS]...
```

## model-yaml

Generate schema YAML using codegen or dbt-profiler

```
dp generate model-yaml [OPTIONS] [MODEL_PATH]...
```

## Options

**--env** <env>

Name of the environment

**Default** local

**--with-meta**

Whether to generate dbt-profiler metadata

**--overwrite**

Whether to overwrite existing YAML files

## Arguments

**MODEL\_PATH**

Optional argument(s)

### source-sql

Generate SQLs that represents tables in given dataset

```
dp generate source-sql [OPTIONS]
```

#### Options

**--env** <env>

Name of the environment

**Default** local

**--source-yaml-path** <source\_yaml\_path>

**Required** Path to the 'source.yml' schema file

**Default** /home/docs/checkouts/readthedocs.org/user\_builds/data-pipelines-cli/checkouts/0.22.1/docs/models/source/source.yml

**--staging-path** <staging\_path>

**Required** Path to the 'staging' directory

**Default** /home/docs/checkouts/readthedocs.org/user\_builds/data-pipelines-cli/checkouts/0.22.1/docs/models/staging

**--overwrite**

Whether to overwrite existing SQL files

### source-yaml

Generate source YAML using codegen

```
dp generate source-yaml [OPTIONS] [SCHEMA_NAME]...
```

#### Options

**--env** <env>

Name of the environment

**Default** local

**--source-path** <source\_path>

**Required** Path to the 'source' directory

**Default** /home/docs/checkouts/readthedocs.org/user\_builds/data-pipelines-cli/checkouts/0.22.1/docs/models/source

**--overwrite**

Whether to overwrite an existing YAML file

## Arguments

### SCHEMA\_NAME

Optional argument(s)

## init

Configure the tool for the first time

```
dp init [OPTIONS] [CONFIG_PATH]...
```

## Arguments

### CONFIG\_PATH

Optional argument(s)

## prepare-env

Prepare local environment for apps interfacing with dbt

```
dp prepare-env [OPTIONS]
```

## Options

**--env** <env>

Name of the environment

## publish

Create a dbt package out of the project

```
dp publish [OPTIONS]
```

## Options

**--key-path** <key\_path>

**Required** Path to the key with write access to repo with published packages

**--env** <env>

**Required** Name of the environment

**Default** base

### run

Run the project on the local machine

```
dp run [OPTIONS]
```

### Options

**--env** <env>

Name of the environment

**Default** local

### seed

Run 'dbt seed'

```
dp seed [OPTIONS]
```

### Options

**--env** <env>

Name of the environment

**Default** local

### template-list

Print a list of all templates saved in the config file

```
dp template-list [OPTIONS]
```

### test

Run tests of the project on the local machine

```
dp test [OPTIONS]
```

### Options

**--env** <env>

Name of the environment

**Default** local

## update

Update project from its template

```
dp update [OPTIONS] [PROJECT_PATH] ...
```

## Options

**--vcs-ref** <vcs\_ref>

Git reference to checkout

## Arguments

**PROJECT\_PATH**

Optional argument(s)

## 2.7 API Reference

If you are looking for information on a specific function, class, or method, this part of the documentation is for you.

### 2.7.1 data\_pipelines\_cli package

data-pipelines-cli (dp) is a CLI tool designed for data platform.

dp helps data analysts to create, maintain and make full use of their data pipelines.

### Subpackages

**data\_pipelines\_cli.cli\_commands package**

### Subpackages

**data\_pipelines\_cli.cli\_commands.generate package**

### Submodules

**data\_pipelines\_cli.cli\_commands.generate.generate module**

**data\_pipelines\_cli.cli\_commands.generate.model\_yaml module**

**class MacroArgName(\*\*kwargs)**

Bases: dict

**arg\_name:** str

**deps\_name:** str

**macro\_name:** str

**generate\_model\_yamls**(*env: str, with\_meta: bool, overwrite: bool, model\_paths: Sequence[pathlib.Path]*) → None

### **data\_pipelines\_cli.cli\_commands.generate.source\_sql module**

**generate\_source\_sqls**(*env: str, source\_yaml\_path: pathlib.Path, staging\_path: pathlib.Path, overwrite: bool*) → None

### **data\_pipelines\_cli.cli\_commands.generate.source\_yaml module**

**generate\_source\_yamls**(*env: str, source\_path: pathlib.Path, overwrite: bool, schema\_names: Sequence[str]*) → None

### **data\_pipelines\_cli.cli\_commands.generate.utils module**

**generate\_models\_or\_sources\_from\_single\_table**(*env: str, macro\_name: str, macro\_args: Dict[str, Any], profiles\_path: pathlib.Path*) → Dict[str, Any]

**get\_macro\_run\_output**(*env: str, macro\_name: str, macro\_args: Dict[str, str], profiles\_path: pathlib.Path*) → str

**get\_output\_file\_or\_warn\_if\_exists**(*directory: pathlib.Path, overwrite: bool, file\_extension: str, filename: Optional[str] = None*) → Optional[pathlib.Path]

## **Submodules**

### **data\_pipelines\_cli.cli\_commands.clean module**

**clean**() → None

Delete local working directories.

### **data\_pipelines\_cli.cli\_commands.compile module**

**compile\_project**(*env: str, docker\_tag: Optional[str] = None, docker\_build: bool = False, docker\_build\_args: Optional[Dict[str, str]] = None*) → None

Create local working directories and build artifacts.

#### **Parameters**

- **env** (*str*) – Name of the environment
- **docker\_tag** (*Optional[str]*) – Image tag of a Docker image to create
- **docker\_build** (*bool*) – Whether to build a Docker image
- **bi\_build** – Whether to generate a BI codes

Raises **DataPipelinesError** –

**replace\_image\_settings**(*image\_tag: str*) → None



**data\_pipelines\_cli.cli\_commands.create module**

**create**(*project\_path*: str, *template\_path*: Optional[str]) → None

Create a new project using a template.

**Parameters**

- **project\_path** (str) – Path to a directory to create
- **template\_path** (Optional[str]) – Path or URI to the repository of the project template

**Raises** *DataPipelinesError* – no template found in *.dp.yml* config file

**data\_pipelines\_cli.cli\_commands.deploy module**

**class DeployCommand**(*env*: str, *docker\_push*: bool, *dags\_path*: Optional[str], *provider\_kwargs\_dict*: Optional[Dict[str, Any]], *datahub\_ingest*: bool, *bi\_git\_key\_path*: str)

Bases: object

A class used to push and deploy the project to the remote machine.

**bi\_git\_key\_path**: str

**blob\_address\_path**: str

URI of the cloud storage to send build artifacts to

**datahub\_ingest**: bool

Whether to ingest DataHub metadata

**deploy**() → None

Push and deploy the project to the remote machine.

**Raises**

- *DependencyNotInstalledError* – DataHub or Docker not installed
- *DataPipelinesError* – Error while pushing Docker image

**docker\_args**: Optional[*data\_pipelines\_cli.data\_structures.DockerArgs*]

Arguments required by the Docker to make a push to the repository. If set to *None*, *deploy()* will not make a push

**env**: str

**provider\_kwargs\_dict**: Dict[str, Any]

Dictionary of arguments required by a specific cloud storage provider, e.g. path to a token, username, password, etc.

### data\_pipelines\_cli.cli\_commands.docs module

**docs**(*env: str, port: int*) → None

Generate and serve dbt documentation.

**Parameters**

- **env** (*str*) – Name of the environment
- **port** (*int*) – Port to serve dbt documentation on.

### data\_pipelines\_cli.cli\_commands.init module

**init**(*config\_path: Optional[str]*) → None

Configure the tool for the first time.

**Parameters** **config\_path** (*Optional[str]*) – URI of the repository with a template of the config file

**Raises** *DataPipelinesError* – user do not want to overwrite existing config file

### data\_pipelines\_cli.cli\_commands.prepare\_env module

**prepare\_env**(*env: str*) → None

Prepare local environment for use with dbt-related applications.

Prepare local environment for use with applications expecting a “traditional” dbt structure, such as plugins to VS Code. If in doubt, use `dp run` and `dp test` instead.

**Parameters** **env** (*str*) – Name of the environment

### data\_pipelines\_cli.cli\_commands.publish module

**create\_package**() → `pathlib.Path`

Create a dbt package out of the built project.

**Raises** *DataPipelinesError* – There is no model in ‘manifest.json’ file.

**publish\_package**(*package\_path: pathlib.Path, key\_path: str, env: str*) → None

### data\_pipelines\_cli.cli\_commands.run module

**run**(*env: str*) → None

Run the project on the local machine.

**Parameters** **env** (*str*) – Name of the environment

**data\_pipelines\_cli.cli\_commands.seed module****seed**(*env: str*) → None

Run the project on the local machine.

**Parameters** **env** (*str*) – Name of the environment**data\_pipelines\_cli.cli\_commands.template module****list\_templates**() → None

Print a list of all templates saved in the config file.

**data\_pipelines\_cli.cli\_commands.test module****test**(*env: str*) → None

Run tests of the project on the local machine.

**Parameters** **env** (*str*) – Name of the environment**data\_pipelines\_cli.cli\_commands.update module****update**(*project\_path: str, vcs\_ref: str*) → None

Update an existing project from its template.

**Parameters**

- **project\_path** (*str*) – Path to a directory to create
- **vcs\_ref** (*str*) – Git reference to checkout in projects template

**Submodules****data\_pipelines\_cli.cli module****cli**() → None**data\_pipelines\_cli.cli\_configs module****find\_datahub\_config\_file**(*env: str*) → pathlib.Path**data\_pipelines\_cli.cli\_constants module**

**DEFAULT\_GLOBAL\_CONFIG:** *data\_pipelines\_cli.data\_structures.DataPipelinesConfig* =  
 {'templates': {}, 'vars': {}}

Content of the config file created by *dp init* command if no template path is provided**IMAGE\_TAG\_TO\_REPLACE:** *str* = '<IMAGE\_TAG>'

**PROFILE\_NAME\_ENV\_EXECUTION** = 'env\_execution'

Name of the dbt target to use for a remote machine

**PROFILE\_NAME\_LOCAL\_ENVIRONMENT** = 'local'

Name of the environment and dbt target to use for a local machine

**get\_dbt\_profiles\_env\_name**(*env: str*) → str

Given a name of the environment, returns one of target names expected by the *profiles.yml* file.

**Parameters** **env** (*str*) – Name of the environment

**Returns** Name of the *target* to be used in *profiles.yml*

## **data\_pipelines\_cli.cli\_utils module**

**echo\_error**(*text: str, \*\*kwargs: Any*) → None

Print an error message to stderr using click-specific print function.

### **Parameters**

- **text** (*str*) – Message to print
- **kwargs** –

**echo\_info**(*text: str, \*\*kwargs: Any*) → None

Print a message to stdout using click-specific print function.

### **Parameters**

- **text** (*str*) – Message to print
- **kwargs** –

**echo\_suberror**(*text: str, \*\*kwargs: Any*) → None

Print a suberror message to stderr using click-specific print function.

### **Parameters**

- **text** (*str*) – Message to print
- **kwargs** –

**echo\_subinfo**(*text: str, \*\*kwargs: Any*) → None

Print a subinfo message to stdout using click-specific print function.

### **Parameters**

- **text** (*str*) – Message to print
- **kwargs** –

**echo\_warning**(*text: str, \*\*kwargs: Any*) → None

Print a warning message to stderr using click-specific print function.

### **Parameters**

- **text** (*str*) – Message to print
- **kwargs** –

**get\_argument\_or\_environment\_variable**(*argument: Optional[str], argument\_name: str, environment\_variable\_name: str*) → str

Given *argument* is not None, return its value. Otherwise, search for *environment\_variable\_name* amongst environment variables and return it. If such a variable is not set, raise [\*DataPipelinesError\*](#).

**Parameters**

- **argument** (*Optional[str]*) – Optional value passed to the CLI as the *argument\_name*
- **argument\_name** (*str*) – Name of the CLI's argument
- **environment\_variable\_name** (*str*) – Name of the environment variable to search for

**Returns** Value of the *argument* or specified environment variable

**Raises** [\*DataPipelinesError\*](#) – *argument* is None and *environment\_variable\_name* is not set

**subprocess\_run**(*args: List[str], capture\_output: bool = False*) → subprocess.CompletedProcess[bytes]

Run subprocess and return its state if completed with a success. If not, raise [\*SubprocessNonZeroExitError\*](#).

**Parameters**

- **args** (*List[str]*) – List of strings representing subprocess and its arguments
- **capture\_output** (*bool*) – Whether to capture output of subprocess.

**Returns** State of the completed process

**Return type** subprocess.CompletedProcess[bytes]

**Raises** [\*SubprocessNonZeroExitError\*](#) – subprocess exited with non-zero exit code

## data\_pipelines\_cli.config\_generation module

**class DbtProfile**(*\*\*kwargs*)

Bases: dict

POD representing dbt's *profiles.yml* file.

**outputs:** Dict[str, Dict[str, Any]]

Dictionary of a warehouse data and credentials, referenced by *target* name

**target:** str

Name of the *target* for dbt to run

**copy\_config\_dir\_to\_build\_dir**() → None

Recursively copy *config* directory to *build/dag/config* working directory.

**copy\_dag\_dir\_to\_build\_dir**() → None

Recursively copy *dag* directory to *build/dag* working directory.

**generate\_profiles\_dict**(*env: str, copy\_config\_dir: bool*) → Dict[str, [\*data\\_pipelines\\_cli.config\\_generation.DbtProfile\*](#)]

Generate and save *profiles.yml* file at *build/profiles/local* or *build/profiles/env\_execution*, depending on *env* argument.

**Parameters**

- **env** (*str*) – Name of the environment
- **copy\_config\_dir** (*bool*) – Whether to copy *config* directory to *build* working directory

**Returns** Dictionary representing data to be saved in *profiles.yml*

**Return type** Dict[str, [DbtProfile](#)]

**generate\_profiles\_yaml**(*env*: str, *copy\_config\_dir*: bool = True) → pathlib.Path

Generate and save profiles.yml file at build/profiles/local or build/profiles/env\_execution, depending on *env* argument.

**Parameters**

- **env** (str) – Name of the environment
- **copy\_config\_dir** (bool) – Whether to copy config directory to build working directory

**Returns** Path to build/profiles/{env}

**Return type** pathlib.Path

**get\_profiles\_dir\_build\_path**(*env*: str) → pathlib.Path

Returns path to build/profiles/<profile\_name>/, depending on *env* argument.

**Parameters** **env** (str) – Name of the environment

**Returns**

**Return type** pathlib.Path

**read\_dictionary\_from\_config\_directory**(*config\_path*: Union[str, os.PathLike[str]], *env*: str, *file\_name*: str) → Dict[str, Any]

Read dictionaries out of *file\_name* in both *base* and *env* directories, and compile them into one. Values from *env* directory get precedence over *base* ones.

**Parameters**

- **config\_path** (Union[str, os.PathLike[str]]) – Path to the *config* directory
- **env** (str) – Name of the environment
- **file\_name** (str) – Name of the YAML file to parse dictionary from

**Returns** Compiled dictionary

**Return type** Dict[str, Any]

## data\_pipelines\_cli.data\_structures module

**class DataPipelinesConfig**(\*\*kwargs)

Bases: dict

POD representing .dp.yml config file.

**templates:** Dict[str, [data\\_pipelines\\_cli.data\\_structures.TemplateConfig](#)]

Dictionary of saved templates to use in *dp create* command

**vars:** Dict[str, str]

Variables to be passed to dbt as *--vars* argument

**class DbtModel**(\*\*kwargs)

Bases: dict

POD representing a single model from 'schema.yml' file.

**columns:** List[[data\\_pipelines\\_cli.data\\_structures.DbtTableColumn](#)]

```

    description: str
    identifier: str
    meta: Dict[str, Any]
    name: str
    tags: List[str]
    tests: List[str]
class DbtSource(**kwargs)
    Bases: dict
    POD representing a single source from 'schema.yml' file.
    database: str
    description: str
    meta: Dict[str, Any]
    name: str
    schema: str
    tables: List[data_pipelines_cli.data_structures.DbtModel]
    tags: List[str]
class DbtTableColumn(**kwargs)
    Bases: dict
    POD representing a single column from 'schema.yml' file.
    description: str
    meta: Dict[str, Any]
    name: str
    quote: bool
    tags: List[str]
    tests: List[str]
class DockerArgs(env: str, image_tag: Optional[str], build_args: Dict[str, str])
    Bases: object
    Arguments required by the Docker to make a push to the repository.
    Raises DataPipelinesError – repository variable not set or git hash not found
    build_args: Dict[str, str]
    docker_build_tag() → str
    Prepare a tag for Docker Python API build command.
    Returns Tag for Docker Python API build command
    Return type str

```

**image\_tag:** `str`

An image tag

**repository:** `str`

URI of the Docker images repository

**class** `TemplateConfig(**kwargs)`

Bases: `dict`

POD representing value referenced in the *templates* section of the *.dp.yml* config file.

**template\_name:** `str`

Name of the template

**template\_path:** `str`

Local path or Git URI to the template repository

**read\_env\_config()** → *data\_pipelines\_cli.data\_structures.DataPipelinesConfig*

Parse *.dp.yml* config file, if it exists. Otherwise, raises *NoConfigFileError*.

**Returns** POD representing *.dp.yml* config file, if it exists

**Return type** *DataPipelinesConfig*

**Raises** *NoConfigFileError* – *.dp.yml* file not found

## **data\_pipelines\_cli.dbt\_utils module**

**read\_dbt\_vars\_from\_configs**(*env: str*) → `Dict[str, Any]`

Read *vars* field from dp configuration file (*\$HOME/.dp.yml*), base *dbt.yml* config (*config/base/dbt.yml*) and environment-specific config (*config/{env}/dbt.yml*) and compile into one dictionary.

**Parameters** *env* (*str*) – Name of the environment

**Returns** Dictionary with *vars* and their keys

**Return type** `Dict[str, Any]`

**run\_dbt\_command**(*command: Tuple[str, ...]*, *env: str*, *profiles\_path: pathlib.Path*, *log\_format\_json: bool = False*, *capture\_output: bool = False*) → `subprocess.CompletedProcess[bytes]`

Run dbt subprocess in a context of specified *env*.

**Parameters**

- **command** (*Tuple[str, ...]*) – Tuple representing dbt command and its optional arguments
- **env** (*str*) – Name of the environment
- **profiles\_path** (*pathlib.Path*) – Path to the directory containing *profiles.yml* file
- **log\_format\_json** (*bool*) – Whether to run dbt command with *-log-format=json* flag
- **capture\_output** (*bool*) – Whether to capture stdout of subprocess.

**Returns** State of the completed process

**Return type** `subprocess.CompletedProcess[bytes]`

**Raises**

- *SubprocessNotFound* – dbt not installed
- *SubprocessNonZeroExitError* – dbt exited with error



**data\_pipelines\_cli.docker\_response\_reader module****class DockerReadResponse**(*msg: str, is\_error: bool*)

Bases: object

POD representing Docker response processed by *DockerResponseReader*.**is\_error: bool**

Whether response is error or not

**msg: str**

Read and processed message

**class DockerResponseReader**(*logs\_generator: Iterable[Union[str, Dict[str, Union[str, Dict[str, str]]]]]*)

Bases: object

Read and process Docker response.

Docker response turns into processed strings instead of plain dictionaries.

**cached\_read\_response:****Optional[List[data\_pipelines\_cli.docker\_response\_reader.DockerReadResponse]]**

Internal cache of already processed response

**click\_echo\_ok\_responses()** → None

Read, process and print positive Docker updates.

**Raises** *DockerErrorResponseError* – Came across error update in Docker response.**logs\_generator: Iterable[Union[str, Dict[str, Union[str, Dict[str, str]]]]]**

Iterable representing Docker response

**read\_response()** → List[data\_pipelines\_cli.docker\_response\_reader.DockerReadResponse]

Read and process Docker response.

**Returns** List of processed lines of response**Return type** List[DockerReadResponse]**data\_pipelines\_cli.errors module****exception AirflowDagsPathKeyError**Bases: *data\_pipelines\_cli.errors.DataPipelinesError*Exception raised if there is no *dags\_path* in *airflow.yml* file.**message: str**

explanation of the error

**submessage: Optional[str]**

additional informations for the error

**exception DataPipelinesError**(*message: str, submessage: Optional[str] = None*)

Bases: Exception

Base class for all exceptions in *data\_pipelines\_cli* module**message: str**

explanation of the error

**submessage: Optional[str]**

additional informations for the error

**exception DependencyNotInstalledError**(*program\_name: str*)

Bases: *data\_pipelines\_cli.errors.DataPipelinesError*

Exception raised if certain dependency is not installed

**message: str**

explanation of the error

**submessage: Optional[str]**

additional informations for the error

**exception DockerErrorResponseError**(*error\_msg: str*)

Bases: *data\_pipelines\_cli.errors.DataPipelinesError*

Exception raised if there is an error response from Docker client.

**message: str**

explanation of the error

**submessage: Optional[str]**

additional informations for the error

**exception DockerNotInstalledError**

Bases: *data\_pipelines\_cli.errors.DependencyNotInstalledError*

Exception raised if 'docker' is not installed

**message: str**

explanation of the error

**submessage: Optional[str]**

additional informations for the error

**exception JinjaVarKeyError**(*key: str*)

Bases: *data\_pipelines\_cli.errors.DataPipelinesError*

**message: str**

explanation of the error

**submessage: Optional[str]**

additional informations for the error

**exception NoConfigFileError**

Bases: *data\_pipelines\_cli.errors.DataPipelinesError*

Exception raised if *.dp.yml* does not exist

**message: str**

explanation of the error

**submessage: Optional[str]**

additional informations for the error

**exception NotAProjectDirectoryError**(*project\_path: str*)

Bases: *data\_pipelines\_cli.errors.DataPipelinesError*

Exception raised if *.copier-answers.yml* file does not exist in given dir

**message:** `str`  
 explanation of the error

**submessage:** `Optional[str]`  
 additional informations for the error

#### **exception NotSupportedBIErrors**

Bases: `data_pipelines_cli.errors.DataPipelinesError`

Exception raised if there is no `target_id` in `bi.yml`

**message:** `str`  
 explanation of the error

**submessage:** `Optional[str]`  
 additional informations for the error

#### **exception SubprocessNonZeroExitError**(*subprocess\_name: str, exit\_code: int, subprocess\_output: Optional[str] = None*)

Bases: `data_pipelines_cli.errors.DataPipelinesError`

Exception raised if subprocess exits with non-zero exit code

**message:** `str`  
 explanation of the error

**submessage:** `Optional[str]`  
 additional informations for the error

#### **exception SubprocessNotFound**(*subprocess\_name: str*)

Bases: `data_pipelines_cli.errors.DataPipelinesError`

Exception raised if subprocess cannot be found

**message:** `str`  
 explanation of the error

**submessage:** `Optional[str]`  
 additional informations for the error

### **data\_pipelines\_cli.filesystem\_utils module**

#### **class LocalRemoteSync**(*local\_path: Union[str, os.PathLike[str]], remote\_path: str, remote\_kwargs: Dict[str, str]*)

Bases: `object`

Synchronizes local directory with a cloud storage's one.

**local\_fs:** `fsspec.spec.AbstractFileSystem`  
 FS representing local directory

**local\_path\_str:** `str`  
 Path to local directory

**remote\_path\_str:** `str`  
 Path/URI of the cloud storage directory

**sync**(*delete: bool = True*) → None

Send local files to the remote directory and (optionally) delete unnecessary ones.

**Parameters** **delete** (*bool*) – Whether to delete remote files that are no longer present in local directory

### data\_pipelines\_cli.io\_utils module

**git\_revision\_hash**() → Optional[str]

Get current Git revision hash, if Git is installed and any revision exists.

**Returns** Git revision hash, if possible.

**Return type** Optional[str]

**replace**(*filename: Union[str, os.PathLike[str]], pattern: str, replacement: str*) → None

Perform the pure-Python equivalent of in-place *sed* substitution: e.g., `sed -i -e 's/{pattern}/{replacement}' '{filename}'`.

Beware however, it uses Python regex dialect instead of *sed*'s one. It can introduce regex-related bugs.

### data\_pipelines\_cli.jinja module

**replace\_vars\_with\_values**(*templated\_dictionary: Dict[str, Any], dbt\_vars: Dict[str, Any]*) → Dict[str, Any]

Replace variables in given dictionary using Jinja template in its values.

**Parameters**

- **templated\_dictionary** (*Dict[str, Any]*) – Dictionary with Jinja-templated values
- **dbt\_vars** (*Dict[str, Any]*) – Variables to replace

**Returns** Dictionary with replaced variables

**Return type** Dict[str, Any]

**Raises** *JinjaVarKeyError* – Variable referenced in Jinja template does not exist

### data\_pipelines\_cli.vcs\_utils module

Utilities related to VCS.

**add\_suffix\_to\_git\_template\_path**(*template\_path: str*) → str

Add `.git` suffix to *template\_path*, if necessary.

Check if *template\_path* starts with Git-specific prefix (e.g. `git://`), or `http://` or `https://` protocol. If so, then add `.git` suffix if not present. Does nothing otherwise (as *template\_path* probably points to a local directory).

**Parameters** **template\_path** (*str*) – Path or URI to Git-based repository

**Returns** *template\_path* with `.git` as suffix, if necessary

**Return type** str

## 2.8 Changelog

### 2.8.1 Unreleased

#### 2.8.2 [0.22.1] - 2022-08-22

- Looker integration
- `dp compile` is able generate lookML project for Looker
- `dp deploy` is able to publish lookML codes in Looker's repo and deploy project.

#### 2.8.3 0.22.0 - 2022-08-22

- `dp compile` default environment has been set to `local`
- `GitPython` is not required anymore
- Installation documentation upgrade

#### 2.8.4 0.21.0 - 2022-07-19

- Documentation improvements

#### 2.8.5 0.20.1 - 2022-06-17

##### Fixed

- `dp seed`, `dp run` and `dp test` no longer fail when we are not using git repository.

#### 2.8.6 0.20.0 - 2022-05-04

- `--docker-args` has been added to `dp compile`

#### 2.8.7 0.19.0 - 2022-04-25

##### Added

- `dp seed` command acting as a wrapper for `dbt seed`.

### 2.8.8 0.18.0 - 2022-04-19

#### Added

- `dp docs-serve` command acting as a wrapper for `dbt docs serve`.

### 2.8.9 0.17.0 - 2022-04-11

#### Added

- `pip install data-pipelines-cli[ADAPTER_PROVIDER]` installs adapter alongside **dbt-core**, e.g. `pip install data-pipelines-cli[bigquery]`.

#### Changed

- `dp compile` accepts additional command line argument `--docker-tag`, allowing for custom Docker tag instead of relying on Git commit SHA. Moreover, if `--docker-tag` is not provided, **dp** searches for tag in `build/dag/config/<ENV>/execution_env.yml`. If it is present instead of `<IMAGE_TAG>` to be replaced, **dp** chooses it over Git commit SHA.

### 2.8.10 0.16.0 - 2022-03-24

#### Added

- `dp generate source-yaml` and `dp generate model-yaml` commands that automatically generate YAML schema files for project's sources or models, respectively (using [dbt-codegen](#) or [dbt-profiler](#) under the hood).
- `dp generate source-sql` command that generates SQL representing sources listed in `source.yml` (or a similar file) (again, with the help of [dbt-codegen](#)).

### 2.8.11 0.15.2 - 2022-02-28

#### Changed

- Bumped dbt to 1.0.3.

### 2.8.12 0.15.1 - 2022-02-28

#### Fixed

- Pinned MarkupSafe==2.0.1 to ensure that Jinja works.

### 2.8.13 0.15.0 - 2022-02-11

- Migration to dbt 1.0.1

### 2.8.14 0.14.0 - 2022-02-02

### 2.8.15 0.13.0 - 2022-02-01

### 2.8.16 0.12.0 - 2022-01-31

- `dp publish` will push generated sources to external git repo

### 2.8.17 0.11.0 - 2022-01-18

#### Added

- `dp update` command
- `dp publish` command for creation of dbt package out of the project.

#### Changed

- Docker response in `deploy` and `compile` gets printed as processed strings instead of plain dictionaries.
- `dp compile` parses content of `datahub.yml` and replaces Jinja variables in the form of `var` or `env_var`.
- `dags_path` is read from an env'd `airflow.yml` file.

### 2.8.18 0.10.0 - 2022-01-12

#### Changed

- Run `dbt deps` at the end of `dp prepare-env`.

#### Fixed

- `dp run` and `dp test` are no longer pointing to `profiles.yml` instead of the directory containing it.

### 2.8.19 0.9.0 - 2022-01-03

#### Added

- `--env` flag to `dp deploy`.

### Changed

- Docker repository URI gets read out of `build/config/{env}/k8s.yml`.

### Removed

- `--docker-repository-uri` and `--datahub-gms-uri` from `dp compile` and `dp deploy` commands.
- `dp compile` no longer replaces `<INGEST_ENDPOINT>` in `datahub.yml`, or `<DOCKER_REPOSITORY_URL>` in `k8s.yml`

## 2.8.20 0.8.0 - 2021-12-31

### Changed

- `dp init` and `dp create` automatically adds `.git` suffix to given template paths, if necessary.
- When reading dbt variables, global-scoped variables take precedence over project-scoped ones (it was another way around before).
- Address argument for `dp deploy` is no longer mandatory. It should be either placed in `airflow.yml` file as value of `dags_path` key, or provided with `--dags-path` flag.

## 2.8.21 0.7.0 - 2021-12-29

### Added

- Add documentation in the style of [Read the Docs](#).
- Exception classes in `errors.py`, deriving from `DataPipelinesError` base exception class.
- Unit tests to massively improve code coverage.
- `--version` flag to `dp` command.
- Add `dp prepare-env` command that prepares local environment for standalone **dbt** (right now, it only generates and saves `profiles.yml` in `$HOME/.dbt`).

### Changed

- `dp compile`:
  - `--env` option has a default value: `base`,
  - `--datahub` is changed to `--datahub-gms-uri`, `--repository` is changed to `--docker-repository-uri`.
- `dp deploy`'s `--docker-push` is not a flag anymore and requires a Docker repository URI parameter; `--repository` got removed then.
- `dp run` and `dp test` run `dp compile` before actual **dbt** command.
- Functions raise exceptions instead of exiting using `sys.exit(1)`; `cli.cli()` entrypoint is expecting exception and exits only there.
- `dp deploy` raises an exception if there is no Docker image to push or `build/config/dag` directory does not exist.



- Rename gcp to gcs in requirements (now one should run `pip install data-pipelines-cli[gcs]`).

## 2.8.22 0.6.0 - 2021-12-16

### Modified

- **dp** saves generated `profiles.yml` in either `build/local` or `build/env_execution` directories. **dbt** gets executed with `env_execution` as the target.

## 2.8.23 0.5.1 - 2021-12-14

### Fixed

- `_dbt_compile` is no longer removing replaced `<IMAGE_TAG>`.

## 2.8.24 0.5.0 - 2021-12-14

### Added

- `echo_warning` function prints warning messages in yellow/orange color.

### Modified

- Docker image gets built at the end of `compile` command.
- **dbt**-related commands do not fail if no `$HOME/.dp.yml` exists (e.g., `dp run`).

### Removed

- Dropped `dbt-airflow-manifest-parser` dependency.

## 2.8.25 0.4.0 - 2021-12-13

### Added

- `dp run` and `dp test` commands.
- `dp clean` command for removing `build` and `target` directories.
- File synchronization tests for Google Cloud Storage using `gcp-storage-emulator`.
- Read vars from config files (`$HOME/.dp.yml`, `config/$ENV/dbt.yml`) and pass to `dbt`.

**Modified**

- `profiles.yml` gets generated and saved in `build` directory in `dp compile`, instead of relying on a local one in the main project directory.
- `dp dbt <command>` generates `profiles.yml` in `build` directory by default.
- `dp init` is expecting `config_path` argument to download config template with the help of the `copier` and save it in `$HOME/.dp.yml`.
- `dp template list` is renamed as `dp template-list`.
- `dp create` allows for providing extra argument called `template-path`, being either name of one of templates defined in `.dp.yml` config file or direct link to Git repository.

**Removed**

- Support for manually created `profiles.yml` in main project directory.
- `dp template new` command.
- `username` field from `$HOME/.dp.yml` file.

**2.8.26 0.3.0 - 2021-12-06**

- Run `dbt deps` alongside rest of `dbt` commands in `dp compile`

**2.8.27 0.2.0 - 2021-12-03**

- Add support for GCP and S3 syncing in `dp deploy`

**2.8.28 0.1.2 - 2021-12-02**

- Fix: do not use styled `click.secho` for Docker push response, as it may not be a `str`

**2.8.29 0.1.1 - 2021-12-01**

- Fix Docker SDK for Python's bug related to tagging, which prevented Docker from pushing images.

**2.8.30 0.1.0 - 2021-12-01****Added**

- Draft of `dp init`, `dp create`, `dp template new`, `dp template list` and `dp dbt`
- Draft of `dp compile` and `dp deploy`

## PYTHON MODULE INDEX

### d

- `data_pipelines_cli`, 27
- `data_pipelines_cli.cli`, 31
- `data_pipelines_cli.cli_commands`, 27
- `data_pipelines_cli.cli_commands.clean`, 28
- `data_pipelines_cli.cli_commands.compile`, 28
- `data_pipelines_cli.cli_commands.create`, 29
- `data_pipelines_cli.cli_commands.deploy`, 29
- `data_pipelines_cli.cli_commands.docs`, 30
- `data_pipelines_cli.cli_commands.generate`, 27
- `data_pipelines_cli.cli_commands.generate.generate`, 27
- `data_pipelines_cli.cli_commands.generate.model_yaml`, 27
- `data_pipelines_cli.cli_commands.generate.source_sql`, 28
- `data_pipelines_cli.cli_commands.generate.source_yaml`, 28
- `data_pipelines_cli.cli_commands.generate.utils`, 28
- `data_pipelines_cli.cli_commands.init`, 30
- `data_pipelines_cli.cli_commands.prepare_env`, 30
- `data_pipelines_cli.cli_commands.publish`, 30
- `data_pipelines_cli.cli_commands.run`, 30
- `data_pipelines_cli.cli_commands.seed`, 31
- `data_pipelines_cli.cli_commands.template`, 31
- `data_pipelines_cli.cli_commands.test`, 31
- `data_pipelines_cli.cli_commands.update`, 31
- `data_pipelines_cli.cli_configs`, 31
- `data_pipelines_cli.cli_constants`, 31
- `data_pipelines_cli.cli_utils`, 32
- `data_pipelines_cli.config_generation`, 33
- `data_pipelines_cli.data_structures`, 34
- `data_pipelines_cli.dbt_utils`, 36
- `data_pipelines_cli.docker_response_reader`, 37
- `data_pipelines_cli.errors`, 37
- `data_pipelines_cli.filesystem_utils`, 39
- `data_pipelines_cli.io_utils`, 40
- `data_pipelines_cli.jinja`, 40
- `data_pipelines_cli.vcs_utils`, 40



## Symbols

- bi-git-key-path
  - dp-deploy command line option, 22
- blob-args
  - dp-deploy command line option, 22
- dags-path
  - dp-deploy command line option, 22
- datahub-ingest
  - dp-deploy command line option, 22
- docker-args
  - dp-compile command line option, 21
- docker-build
  - dp-compile command line option, 21
- docker-push
  - dp-deploy command line option, 22
- docker-tag
  - dp-compile command line option, 21
- env
  - dp-compile command line option, 21
  - dp-deploy command line option, 22
  - dp-docs-serve command line option, 23
  - dp-generate-model-yaml command line option, 23
  - dp-generate-source-sql command line option, 24
  - dp-generate-source-yaml command line option, 24
  - dp-prepare-env command line option, 25
  - dp-publish command line option, 25
  - dp-run command line option, 26
  - dp-seed command line option, 26
  - dp-test command line option, 26
- key-path
  - dp-publish command line option, 25
- overwrite
  - dp-generate-model-yaml command line option, 23
  - dp-generate-source-sql command line option, 24
  - dp-generate-source-yaml command line option, 24
- port

- dp-docs-serve command line option, 23
- source-path
  - dp-generate-source-yaml command line option, 24
- source-yaml-path
  - dp-generate-source-sql command line option, 24
- staging-path
  - dp-generate-source-sql command line option, 24
- vcs-ref
  - dp-update command line option, 27
- version
  - dp command line option, 21
- with-meta
  - dp-generate-model-yaml command line option, 23

## A

- add\_suffix\_to\_git\_template\_path() (in module *data\_pipelines\_cli.vcs\_utils*), 40
- AirflowDagsPathKeyError, 37
- arg\_name (MacroArgName attribute), 27

## B

- bi\_git\_key\_path (DeployCommand attribute), 29
- blob\_address\_path (DeployCommand attribute), 29
- build\_args (DockerArgs attribute), 35

## C

- cached\_read\_response (DockerResponseReader attribute), 37
- clean() (in module *data\_pipelines\_cli.cli\_commands.clean*), 28
- cli() (in module *data\_pipelines\_cli.cli*), 31
- click\_echo\_ok\_responses() (DockerResponseReader method), 37
- columns (DbtModel attribute), 34
- compile\_project() (in module *data\_pipelines\_cli.cli\_commands.compile*), 28
- CONFIG\_PATH

dp-init command line option, 25  
 copy\_config\_dir\_to\_build\_dir() (in module *data\_pipelines\_cli.config\_generation*), 33  
 copy\_dag\_dir\_to\_build\_dir() (in module *data\_pipelines\_cli.config\_generation*), 33  
 create() (in module *data\_pipelines\_cli.cli\_commands.create*), module, 31  
 29  
 create\_package() (in module *data\_pipelines\_cli.cli\_commands.publish*), 30

## D

data\_pipelines\_cli  
   module, 27  
 data\_pipelines\_cli.cli  
   module, 31  
 data\_pipelines\_cli.cli\_commands  
   module, 27  
 data\_pipelines\_cli.cli\_commands.clean  
   module, 28  
 data\_pipelines\_cli.cli\_commands.compile  
   module, 28  
 data\_pipelines\_cli.cli\_commands.create  
   module, 29  
 data\_pipelines\_cli.cli\_commands.deploy  
   module, 29  
 data\_pipelines\_cli.cli\_commands.docs  
   module, 30  
 data\_pipelines\_cli.cli\_commands.generate  
   module, 27  
 data\_pipelines\_cli.cli\_commands.generate.generate\_data  
   module, 27  
 data\_pipelines\_cli.cli\_commands.generate.model\_yaml  
   module, 27  
 data\_pipelines\_cli.cli\_commands.generate.source\_sql  
   module, 28  
 data\_pipelines\_cli.cli\_commands.generate.source\_yaml  
   module, 28  
 data\_pipelines\_cli.cli\_commands.generate.utils  
   module, 28  
 data\_pipelines\_cli.cli\_commands.init  
   module, 30  
 data\_pipelines\_cli.cli\_commands.prepare\_env  
   module, 30  
 data\_pipelines\_cli.cli\_commands.publish  
   module, 30  
 data\_pipelines\_cli.cli\_commands.run  
   module, 30  
 data\_pipelines\_cli.cli\_commands.seed  
   module, 31  
 data\_pipelines\_cli.cli\_commands.template  
   module, 31  
 data\_pipelines\_cli.cli\_commands.test  
   module, 31  
 data\_pipelines\_cli.cli\_commands.update  
   module, 31  
 data\_pipelines\_cli.cli\_configs  
   module, 31  
 data\_pipelines\_cli.cli\_constants  
   module, 31  
 data\_pipelines\_cli.cli\_utils  
   module, 32  
 data\_pipelines\_cli.config\_generation  
   module, 33  
 data\_pipelines\_cli.data\_structures  
   module, 34  
 data\_pipelines\_cli.dbt\_utils  
   module, 36  
 data\_pipelines\_cli.docker\_response\_reader  
   module, 37  
 data\_pipelines\_cli.errors  
   module, 37  
 data\_pipelines\_cli.filesystem\_utils  
   module, 39  
 data\_pipelines\_cli.io\_utils  
   module, 40  
 data\_pipelines\_cli.jinja  
   module, 40  
 data\_pipelines\_cli.vcs\_utils  
   module, 40  
 database (*DbtSource* attribute), 35  
 datahub\_ingest (*DeployCommand* attribute), 29  
 DataPipelinesConfig (class in *data\_pipelines\_cli.data\_structures*), 34  
 DataPipelinesError, 37  
 DbtModel (class in *data\_pipelines\_cli.data\_structures*), 34  
 DbtProfile (class in *data\_pipelines\_cli.config\_generation*), 34  
 DbtSource (class in *data\_pipelines\_cli.data\_structures*), 35  
 DbtTableColumn (class in *data\_pipelines\_cli.data\_structures*), 35  
 DEFAULT\_GLOBAL\_CONFIG (in module *data\_pipelines\_cli.cli\_constants*), 31  
 DependencyNotInstalledError, 38  
 deploy() (*DeployCommand* method), 29  
 DeployCommand (class in *data\_pipelines\_cli.cli\_commands.deploy*), 29  
 deps\_name (*MacroArgName* attribute), 27  
 description (*DbtModel* attribute), 34  
 description (*DbtSource* attribute), 35  
 description (*DbtTableColumn* attribute), 35  
 docker\_args (*DeployCommand* attribute), 29  
 docker\_build\_tag() (*DockerArgs* method), 35  
 DockerArgs (class in *data\_pipelines\_cli.data\_structures*), 35

DockerErrorResponseError, 38  
 DockerNotInstalledError, 38  
 DockerReadResponse (class in *data\_pipelines\_cli.docker\_response\_reader*), 37  
 DockerResponseReader (class in *data\_pipelines\_cli.docker\_response\_reader*), 37  
 docs() (in module *data\_pipelines\_cli.cli\_commands.docs*), 30  
 dp command line option  
   --version, 21  
 dp-compile command line option  
   --docker-args, 21  
   --docker-build, 21  
   --docker-tag, 21  
   --env, 21  
 dp-create command line option  
   PROJECT\_PATH, 22  
   TEMPLATE\_PATH, 22  
 dp-deploy command line option  
   --bi-git-key-path, 22  
   --blob-args, 22  
   --dags-path, 22  
   --datahub-ingest, 22  
   --docker-push, 22  
   --env, 22  
 dp-docs-serve command line option  
   --env, 23  
   --port, 23  
 dp-generate-model-yaml command line option  
   --env, 23  
   --overwrite, 23  
   --with-meta, 23  
   MODEL\_PATH, 23  
 dp-generate-source-sql command line option  
   --env, 24  
   --overwrite, 24  
   --source-yaml-path, 24  
   --staging-path, 24  
 dp-generate-source-yaml command line option  
   --env, 24  
   --overwrite, 24  
   --source-path, 24  
   SCHEMA\_NAME, 25  
 dp-init command line option  
   CONFIG\_PATH, 25  
 dp-prepare-env command line option  
   --env, 25  
 dp-publish command line option  
   --env, 25  
   --key-path, 25  
 dp-run command line option  
   --env, 26  
   dp-seed command line option  
     --env, 26  
   dp-test command line option  
     --env, 26  
   dp-update command line option  
     --vcs-ref, 27  
     PROJECT\_PATH, 27

## E

echo\_error() (in module *data\_pipelines\_cli.cli\_utils*), 32  
 echo\_info() (in module *data\_pipelines\_cli.cli\_utils*), 32  
 echo\_suberror() (in module *data\_pipelines\_cli.cli\_utils*), 32  
 echo\_subinfo() (in module *data\_pipelines\_cli.cli\_utils*), 32  
 echo\_warning() (in module *data\_pipelines\_cli.cli\_utils*), 32  
 env (DeployCommand attribute), 29

## F

find\_datahub\_config\_file() (in module *data\_pipelines\_cli.cli\_configs*), 31

## G

generate\_model\_yamls() (in module *data\_pipelines\_cli.cli\_commands.generate.model\_yaml*), 28  
 generate\_models\_or\_sources\_from\_single\_table() (in module *data\_pipelines\_cli.cli\_commands.generate.utils*), 28  
 generate\_profiles\_dict() (in module *data\_pipelines\_cli.config\_generation*), 33  
 generate\_profiles\_yaml() (in module *data\_pipelines\_cli.config\_generation*), 34  
 generate\_source\_sqls() (in module *data\_pipelines\_cli.cli\_commands.generate.source\_sql*), 28  
 generate\_source\_yamls() (in module *data\_pipelines\_cli.cli\_commands.generate.source\_yaml*), 28  
 get\_argument\_or\_environment\_variable() (in module *data\_pipelines\_cli.cli\_utils*), 32  
 get\_dbt\_profiles\_env\_name() (in module *data\_pipelines\_cli.cli\_constants*), 32  
 get\_macro\_run\_output() (in module *data\_pipelines\_cli.cli\_commands.generate.utils*), 28  
 get\_output\_file\_or\_warn\_if\_exists() (in module *data\_pipelines\_cli.cli\_commands.generate.utils*), 28  
 get\_profiles\_dir\_build\_path() (in module *data\_pipelines\_cli.config\_generation*), 34

`git_revision_hash()` (in *module*  
*data\_pipelines\_cli.io\_utils*), 40

## I

`identifier` (*DbtModel attribute*), 35

`image_tag` (*DockerArgs attribute*), 35

`IMAGE_TAG_TO_REPLACE` (in *module*  
*data\_pipelines\_cli.cli\_constants*), 31

`init()` (in *module data\_pipelines\_cli.cli\_commands.init*), 30

`is_error` (*DockerReadResponse attribute*), 37

## J

`JinjaVarKeyError`, 38

## L

`list_templates()` (in *module*  
*data\_pipelines\_cli.cli\_commands.template*), 31

`local_fs` (*LocalRemoteSync attribute*), 39

`local_path_str` (*LocalRemoteSync attribute*), 39

`LocalRemoteSync` (class in  
*data\_pipelines\_cli.filesystem\_utils*), 39

`logs_generator` (*DockerResponseReader attribute*), 37

## M

`macro_name` (*MacroArgName attribute*), 27

`MacroArgName` (class in  
*data\_pipelines\_cli.cli\_commands.generate.model\_yaml*), 31  
27

`message` (*AirflowDagsPathKeyError attribute*), 37

`message` (*DataPipelinesError attribute*), 37

`message` (*DependencyNotInstalledError attribute*), 38

`message` (*DockerErrorResponseError attribute*), 38

`message` (*DockerNotInstalledError attribute*), 38

`message` (*JinjaVarKeyError attribute*), 38

`message` (*NoConfigFileError attribute*), 38

`message` (*NotAProjectDirectoryError attribute*), 38

`message` (*NotSupportedBIError attribute*), 39

`message` (*SubprocessNonZeroExitError attribute*), 39

`message` (*SubprocessNotFound attribute*), 39

`meta` (*DbtModel attribute*), 35

`meta` (*DbtSource attribute*), 35

`meta` (*DbtTableColumn attribute*), 35

`MODEL_PATH`

`dp-generate-model-yaml` command line  
option, 23

*module*

*data\_pipelines\_cli*, 27

*data\_pipelines\_cli.cli*, 31

*data\_pipelines\_cli.cli\_commands*, 27

*data\_pipelines\_cli.cli\_commands.clean*, 28

*data\_pipelines\_cli.cli\_commands.compile*,  
28

*data\_pipelines\_cli.cli\_commands.create*,  
29

*data\_pipelines\_cli.cli\_commands.deploy*,  
29

*data\_pipelines\_cli.cli\_commands.docs*, 30

*data\_pipelines\_cli.cli\_commands.generate*,  
27

*data\_pipelines\_cli.cli\_commands.generate.generate*,  
27

*data\_pipelines\_cli.cli\_commands.generate.model\_yaml*,  
27

*data\_pipelines\_cli.cli\_commands.generate.source\_sql*,  
28

*data\_pipelines\_cli.cli\_commands.generate.source\_yaml*,  
28

*data\_pipelines\_cli.cli\_commands.generate.utils*,  
28

*data\_pipelines\_cli.cli\_commands.init*, 30

*data\_pipelines\_cli.cli\_commands.prepare\_env*,  
30

*data\_pipelines\_cli.cli\_commands.publish*,  
30

*data\_pipelines\_cli.cli\_commands.run*, 30

*data\_pipelines\_cli.cli\_commands.seed*, 31

*data\_pipelines\_cli.cli\_commands.template*,  
31

*data\_pipelines\_cli.cli\_commands.test*, 31

*data\_pipelines\_cli.cli\_commands.update*,  
31

*data\_pipelines\_cli.cli\_configs*, 31

*data\_pipelines\_cli.cli\_constants*, 31

*data\_pipelines\_cli.cli\_utils*, 32

*data\_pipelines\_cli.config\_generation*, 33

*data\_pipelines\_cli.data\_structures*, 34

*data\_pipelines\_cli.dbt\_utils*, 36

*data\_pipelines\_cli.docker\_response\_reader*,  
37

*data\_pipelines\_cli.errors*, 37

*data\_pipelines\_cli.filesystem\_utils*, 39

*data\_pipelines\_cli.io\_utils*, 40

*data\_pipelines\_cli.jinja*, 40

*data\_pipelines\_cli.vcs\_utils*, 40

`msg` (*DockerReadResponse attribute*), 37

## N

`name` (*DbtModel attribute*), 35

`name` (*DbtSource attribute*), 35

`name` (*DbtTableColumn attribute*), 35

`NoConfigFileError`, 38

`NotAProjectDirectoryError`, 38

`NotSupportedBIError`, 39

## O

`outputs` (*DbtProfile attribute*), 33



## P

`prepare_env()` (in module `data_pipelines_cli.cli_commands.prepare_env`), 30

`PROFILE_NAME_ENV_EXECUTION` (in module `data_pipelines_cli.cli_constants`), 31

`PROFILE_NAME_LOCAL_ENVIRONMENT` (in module `data_pipelines_cli.cli_constants`), 32

`PROJECT_PATH`  
     `dp-create` command line option, 22  
     `dp-update` command line option, 27

`provider_kwargs_dict` (*DeployCommand* attribute), 29

`publish_package()` (in module `data_pipelines_cli.cli_commands.publish`), 30

## Q

`quote` (*DbtTableColumn* attribute), 35

## R

`read_dbt_vars_from_configs()` (in module `data_pipelines_cli.dbt_utils`), 36

`read_dictionary_from_config_directory()` (in module `data_pipelines_cli.config_generation`), 34

`read_env_config()` (in module `data_pipelines_cli.data_structures`), 36

`read_response()` (*DockerResponseReader* method), 37

`remote_path_str` (*LocalRemoteSync* attribute), 39

`replace()` (in module `data_pipelines_cli.io_utils`), 40

`replace_image_settings()` (in module `data_pipelines_cli.cli_commands.compile`), 28

`replace_vars_with_values()` (in module `data_pipelines_cli.jinja`), 40

`repository` (*DockerArgs* attribute), 36

`run()` (in module `data_pipelines_cli.cli_commands.run`), 30

`run_dbt_command()` (in module `data_pipelines_cli.dbt_utils`), 36

## S

`schema` (*DbtSource* attribute), 35

`SCHEMA_NAME`  
     `dp-generate-source-yaml` command line option, 25

`seed()` (in module `data_pipelines_cli.cli_commands.seed`), 31

`submessage` (*AirflowDagsPathKeyError* attribute), 37

`submessage` (*DataPipelinesError* attribute), 37

`submessage` (*DependencyNotInstalledError* attribute), 38

`submessage` (*DockerErrorResponseError* attribute), 38

`submessage` (*DockerNotInstalledError* attribute), 38

`submessage` (*JinjaVarKeyError* attribute), 38

`submessage` (*NoConfigFileError* attribute), 38

`submessage` (*NotAProjectDirectoryError* attribute), 39

`submessage` (*NotSupportedBIError* attribute), 39

`submessage` (*SubprocessNonZeroExitError* attribute), 39

`submessage` (*SubprocessNotFound* attribute), 39

`subprocess_run()` (in module `data_pipelines_cli.cli_utils`), 33

`SubprocessNonZeroExitError`, 39

`SubprocessNotFound`, 39

`sync()` (*LocalRemoteSync* method), 39

## T

`tables` (*DbtSource* attribute), 35

`tags` (*DbtModel* attribute), 35

`tags` (*DbtSource* attribute), 35

`tags` (*DbtTableColumn* attribute), 35

`target` (*DbtProfile* attribute), 33

`template_name` (*TemplateConfig* attribute), 36

`TEMPLATE_PATH`  
     `dp-create` command line option, 22

`template_path` (*TemplateConfig* attribute), 36

`TemplateConfig` (class in module `data_pipelines_cli.data_structures`), 36

`templates` (*DataPipelinesConfig* attribute), 34

`test()` (in module `data_pipelines_cli.cli_commands.test`), 31

`tests` (*DbtModel* attribute), 35

`tests` (*DbtTableColumn* attribute), 35

## U

`update()` (in module `data_pipelines_cli.cli_commands.update`), 31

## V

`vars` (*DataPipelinesConfig* attribute), 34